



UNIVERSITÀ
DEGLI STUDI
DI UDINE

Università degli studi di Udine

Modelling the recovery of biocompounds from peach waste assisted by pulsed electric fields or thermal treatment

Original

Availability:

This version is available <http://hdl.handle.net/11390/1187114> since 2020-07-15T15:54:21Z

Publisher:

Published

DOI:10.1016/j.jfoodeng.2020.110196

Terms of use:

The institutional repository of the University of Udine (<http://air.uniud.it>) is provided by ARIC services. The aim is to enable open access to all the world.

Publisher copyright

(Article begins on next page)

Manuscript Number: JFOODENG-D-19-02004

Title: Modelling the recovery of biocompounds from peach waste assisted by pulsed electric fields or thermal treatment

Article Type: VSI:Food Engineering Sustainability

Keywords: Peach waste; Kinetic models; Temperature; Pulsed electric fields

Corresponding Author: Professor Olga Martín-Belloso,

Corresponding Author's Institution: University of Lleida

First Author: Stella Plazzotta, Ph.D.

Order of Authors: Stella Plazzotta, Ph.D.; Raquel Ibarz, Ph.D.; Lara Manzocco, Ph.D.; Olga Martin-Belloso, Ph.D.

Abstract: The recovery of non-purified bioactive extracts (70% ethanol) from peach pomace (PP) was assisted by conventional thermal treatment (CTT, 50 °C up to 90 min) or pulsed electric fields (PEF, specific energy input, EV, of 0.0014–2.88 kJ/kg). The maximum concentration of biocompounds and antioxidant activity, assessed with spectrophotometric and HPLC methods, was obtained upon 40 min by CTT and 0.0014 kJ/kg by PEF, which took 16 μ s. A two-step mechanism was proposed when CTT was applied, considering a first step (zero-order kinetic) in which the PP biocompounds were released into the extraction media and a second degradation stage (first-order). A significant relationship was found between EV and PP biocompound degradation during PEF extraction, and a two-term degradation model was proposed to explain obtained data. The CTT or PEF-assisted recovery of biocompounds from PP was adequately explained by the proposed kinetic models, which are feasible tools to understand the involved phenomena in the extraction procedures.

Subject: Submission of original manuscript

Dear Editor,

Attached you can find the file containing a manuscript entitled *Modelling the recovery of biocompounds from peach waste assisted by pulsed electric fields or thermal treatment* submitted by Stella Plazzotta, Raquel Ibarz, Lara Manzocco and Olga Martín-Belloso to **Journal of Food Engineering** after revision. All the authors have read and approved the manuscript.

The application of advanced manufacturing technologies to assist the extraction processes from fruit residues have received increasing attention in recent years to reduce wastes in such a way that extracts with an improved content of bioactive compounds and great physico-chemical properties could be obtained. For this end, in this study, we have explored the use of thermal or pulsed electric field processes to assist the recovery of bioactive extracts, working with frozen and air-dried peach juice wastes and try to explain the involved phenomena from a mechanistic point of view through kinetic models. Different parameters were studied to allow tracking of the extraction process, such as the content of polyphenols, flavonoids, anthocyanins and vitamin C as well as the antioxidant activity of the frozen and air-dried peach extracts, together with the time required for the biocompounds recovery. In addition, the most advantageous assisted extraction technology for peach waste valorization was identified, regarding the extraction efficacy.

The authors believe that the current research article may significantly contribute to shed light on the valorization of food wastes, understanding the phenomena involved in the thermal and nonthermal assisted extraction by kinetic models.

This scientific contribution was selected to be submitted to a JOURNAL OF FOOD ENGINEERING special issue “Role of Food Engineering in Sustainability” from the XII edition of CIBIA, Iberoamerican Congress of Food Engineering - 2019.

I hope that this article could satisfy the requirements of Journal of Food Engineering, so that you might consider it for publication in the Journal.

Please do not hesitate to contact me for any further eventuality.

I am looking forward to hearing from your earliest news.

Yours sincerely,

Dr. Olga Martín-Belloso
Food Technology Department
Universitat de Lleida
Av. Rovira Roure, 191
25198 LLEIDA (Spain)
omartin@tecal.udl.es

1 **Modelling the recovery of biocompounds from peach waste assisted by pulsed electric fields or**
2 **thermal treatment**

3 Plazzotta, S.¹, Ibarz, R.², Manzocco, L.¹ Martín-Belloso, O.^{2*}

4 ¹Department of Agricultural, Food, Environmental and Animal Sciences, University of Udine, Italy

5 ²Department of Food Technology, University of Lleida, Agrotecnio Center, Spain

6 *e-mail: omartin@tecal.udl.cat; Tel: +34 973 702593

7

8 **Abstract**

9 The recovery of non-purified bioactive extracts (70% ethanol) from peach pomace (PP) was assisted by
10 conventional thermal treatment (CTT, 50 °C up to 90 min) or pulsed electric fields (PEF, specific energy input,
11 E_V , of 0.0014–2.88 kJ/kg). The maximum concentration of biocompounds and antioxidant activity, assessed with
12 spectrophotometric and HPLC methods, was obtained upon 40 min by CTT and 0.0014 kJ/kg by PEF, which
13 took 16 μ s. A two-step mechanism was proposed when CTT was applied, considering a first step (zero-order
14 kinetic) in which the PP biocompounds were released into the extraction media and a second degradation stage
15 (first-order). A significant relationship was found between E_V and PP biocompound degradation during PEF
16 extraction, and a two-term degradation model was proposed to explain obtained data.
17 The CTT or PEF-assisted recovery of biocompounds from PP was adequately explained by the proposed kinetic
18 models, which are feasible tools to understand the involved phenomena in the extraction procedures.

19 **Keywords:** Peach waste; Kinetic models; Temperature; Pulsed electric fields

20

21

1. Introduction

European Union (EU) fruit juice and nectars consumption was 9.2 billion litres in 2017, with peach (*Prunus persica* L.) representing the fourth flavour profile in the market (AIJN, 2018). During peach juice production, a huge amount of waste is generated. Usually, peach pomace (PP), referring to the pressing solid residue generated from peach juicing process, accounts for approximately 10% of the initial fruit weight (Argun & Dao, 2017). Peach is rich in antioxidant biocompounds that are mainly localized in the pulp and peel tissues, which are the main constituents of PP. In particular, phenolic compounds have been found to be the major contributor to the antioxidant activity of peach, followed by ascorbic acid and carotenoids (Gil, Tomás-Barberán, Hess-Pierce, & Kader, 2002; Redondo, Arias, Oria, & Venturini, 2017; Redondo, Venturini, Luengo, Raso, & Arias, 2018). Although this, like other vegetable by-products, PP is currently discarded in landfills, anaerobically digested or composted. These PP management options not only represent a wastage of valuable biomass, but also an environmental burden and an economic cost for companies. For these reasons, the identification of alternative management options, able to properly valorise PP, are required in order to turn this industrial discard into an added-value product. In this regard, the extraction of biocompounds could represent an effective valorisation strategy of PP (El Darra et al., 2018).

Traditional techniques employed in the extraction of antioxidant compounds from fruits involve the use of organic solvents and high temperatures (Li, Smith, & Hossain, 2006). Such extraction processes present high costs and environmental impact, and often result in the thermo-degradation of biocompounds. Moreover, the extraction may be negligible if the cells are intact. In fact, the extraction of biocompounds from vegetable tissues is a mass transfer process, whose rate principally depends on the resistance of the biocompound to migrating into the extraction solvent. The compartmentalization of biocompounds into the cells of the vegetable tissue and their interaction with the vegetable matrix increase this resistance to extraction (Donsì, Ferrari, & Pataro, 2010). Therefore, assisting-technologies, able to disrupt cellular tissue integrity have been increasingly proposed to enhance extraction efficiency, while preserving the bioactive compounds in the extract. Such strategies include the use of microwaves, high pressures (pressurized liquids, supercritical fluids, high pressure homogenization), ultrasounds, and pulsed electric fields (PEF) (Rombaut, Tixier, Bily, & Chemat, 2014). In the case of PEF, the

vegetable material is subjected to external electric fields (1–10 kV/cm) for a short time (microseconds), resulting in the so-called “electroporation” of the cell membranes, which leads to an increase in the cell membrane permeability, thus favouring the biocompounds extraction (Donsì et al., 2010). The application of PEF has many advantages over other assisting techniques. As compared to pressure-based technologies, PEF process has lower energy costs and does not cause the release of undesirable substances into the extraction solvent, due to the slight denaturation of the cell membranes (Redondo et al., 2018). Moreover, as compared to microwaves and ultrasounds, the loss of thermosensitive bioactive compounds is reduced because no temperature increase is generated (Cacace & Mazza, 2003). Based on these technological advantages, PEF has already been used to extract marketable compounds from different vegetable matrices (Kumari, Tiwari, Hossain, Brunton, & Rai, 2018).

It must be noted that the high moisture content of PP is one of the main issues related to its management, since it makes it quickly prone to microbial spoilage (Ajila, Brar, Verma, & Prasada Rao, 2012). Therefore, in a realistic scenario, it is likely that PP should be preliminary frozen or air-dried in order to be subsequently subjected to any extraction process, possibly modifying the content, composition and extractability of bioactive compounds.

Based on these considerations, the aim of this study was to evaluate the recovery of non-purified biocompounds in extracts from PP by extraction processes assisted by PEF or conventional thermal treatment (CTT) and explain the involved phenomena through kinetic models. Frozen and dried PP were subjected to PEF or CTT assisted extractions using a 70% hydroalcoholic solvent and the obtained extracts were analysed for biocompound concentration and antioxidant activity. Moreover, the extraction efficacy was evaluated to identify the more advantageous assisted extraction technology for PP valorization.

2. Materials and Methods

2.1 Reagents

The used reagents were absolute ethanol (Scharlau, Barcelona, Spain.), bidistilled water (Milli-Q system, Millipore, Bedford, USA), Fast Blue reagent (Sigma Aldrich, St.Louis, U.S.A.), Sodium carbonate (Carlo Erba, Milan, Italy) gallic acid 97% (Sigma Aldrich, St. Louis, U.S.A.), Sodium acetate anhydrous (Sigma Aldrich, St.

73 Louis, U.S.A.), Aluminum chloride (Sigma Aldrich, St. Louis, U.S.A.), Quercetin: 2-(3,4-Dihydroxyphenyl)-
74 3,5,7-trihydroxy-4H-1-benzopyran-4-one (Sigma Aldrich, St. Louis, U.S.A.), 1,4-dithiothreitol (DTT) (Sigma
75 Aldrich, St. Louis, U.S.A.), Potassium chloride (Sigma Aldrich, St. Louis, U.S.A.), Meta-phosphoric acid
76 (Sigma Aldrich, St. Louis, U.S.A.), DPPH: 2,2-Diphenyl-1-picrylhydrazyl (Sigma Aldrich, St. Louis, U.S.A.),
77 Trolox: (±)-6-hydroxy-2,5,7,8-tetramethylchromane-2-carboxylic acid 97% (Sigma Aldrich, St. Louis, U.S.A.).

78 **2.2 Peach pomace (PP)**

79 The peach pomace (PP), residue from peach juice extraction, either frozen (-18 °C) or dried (140 °C) and ground
80 was kindly furnished by Indulleida S.A. (Alguaire, Lleida, Spain). Frozen and dried PPs were characterized by a
81 moisture content of about 85.0 ± 1.1 and 4.0 ± 1.0 (g/100 g), respectively, determined using the official
82 gravimetric method (AOAC, 1997). Frozen PP was thawed at 4 °C prior to use. Both frozen and dried PPs were
83 used at room temperature (20 °C).

84 **2.3 Preparation of PP extracts**

85 PP extracts were prepared using aqueous ethanol (70:30 EtOH:H₂O w/w) as solvent. PP (20 g) was placed into a
86 glass flask and added with 200 mL of solvent. The suspension was homogenized by manual mixing for 1 min
87 and immediately subjected to the different extraction protocols. The dispersions were then filtered using 1.2 µm
88 filters (Sartorius 17593-100 cellulose acetate 25 mm/1.20 µm, Filtros, Anoia, Spain) to remove the solid residue,
89 obtaining the extracts. The latter were stored in the dark at -18 °C until analysis. Control extracts were prepared
90 by filtering the PP dispersions immediately after the manual mixing, without any further assisted extraction.

91 **2.3.1 Conventional thermal treatment (CTT)**

92 PP dispersions were subjected to conventional thermal treatment (CTT) by using a thermal bath set at 50 °C.
93 Sample temperature reached 50 °C in less than 5 min and temperature was monitored in order to maintain it at
94 50 °C during the extraction, that was carried out up to 90 min. Sample temperature was measured during CTT by
95 a copper-constantan thermocouple probe connected to a portable data logger (mod. TP100, XS Instruments,
96 Carpi, Italy).

97 **2.3.2 Pulsed electric field treatment (PEF)**

98 PEF treatments were carried out using a unit with 0.1 µF capacitor with an exponential decaying waveform
99 (Physics International, San Leandro, CA, USA). The chamber consists in two parallel stainless-steel plates where
100 the electric field is created when the electric energy is discharged. PP dispersions were placed in the chamber
101 and were treated at 0.8-10 kV/cm, using 4-30 monopolar pulses of 4 µs, at a frequency of 0.1 Hz, which
102 corresponded to a specific energy input (E_v) up to 72 kJ/kg, calculated according to equation 1 (Bot et al., 2018):

103
$$E_v = \frac{V^2 t}{R m} \quad \text{(Equation 1)}$$

104 where V is the voltage (V), t is the time (s) calculated as pulse duration (4 µs) multiplied by pulse number, R is
105 the electrical resistance (Ω) and m (kg) is the PP mass.

106 **2.4 Determination of bioactive compound concentration**

107 **2.4.1 Total polyphenolic (TPC)**

108 Total phenolic content (TPC) was determined using the Fast Blue method (Medina, 2011), adapted to a 96-well
109 microplate. A portion of 200 µL of ethanolic extract, properly diluted, was mixed with 20 µL of Fast Blue
110 reagent (1 mg/mL) and 20 µL of Na₂CO₃ solution (0.05 g/mL). Samples were mixed and stored at room
111 temperature in darkness for 90 min. Absorbance was measured at 420 nm using a UV/VIS Thermo Multiskan
112 Spectrum spectrophotometer (Thermo Scientific, Waltham, USA). Ethanol blanks (70%, w/w) were run in each
113 assay. Calibration curve was built with gallic acid (0–500 mg/L). Results were expressed as mg of gallic acid
114 equivalents (GAE) per 100 g of dry matter (dm).

115 **2.4.2 Total flavonoid (TF)**

116 Total flavonoids (TF) were evaluated using the method of Humadi and Istudor (2008), adapted to a 96-well
117 microplate. An amount of 25µL of the ethanolic extract was added with 140 µL of deionized water, 10µL of
118 C₂H₃NaO₂ (1 g/L) and 10 µL of AlCl₃ (0.1 g/mL). The mixture was homogenized and stored in the dark for 40
119 min. The absorbance was determined at 405 nm using a UV/VIS Thermo Multiskan Spectrum
120 spectrophotometer (Thermo Scientific, Waltham, USA). Blanks containing water instead of C₂H₃NaO₂ and AlCl₃

were run in each assay. Calibration curve was built with quercetin (0–1000 mg/L). Results were expressed as mg of quercetin equivalents (QE) per 100 g of dry matter (dm).

2.4.3 Total anthocyanin (TA)

Total anthocyanin (TA) content was evaluated by differential pH method (Chaovanalikit & Wrolstad, 2004). A portion of 2.5 mL of extract was added to 2.5 mL of 45 g/L metaphosphoric acid solution containing 1,4-Dithiothreitol (7.2 g/L). An aliquot of the sample (1 mL) was added with 1 mL of pH 1.0 buffer (0.025 M potassium chloride). Similarly, 1 mL of the sample was added with 1 mL of pH 4.5 buffer (0.4 g/L sodium acetate). Absorbance (A) was measured using a CECIL 2021 spectrophotometer (Cecil Instruments Ltd., Cambridge, UK) at 520 and 700 nm. Absorbance was calculated as reported in equation 2:

$$A = [(A_{520} - A_{700})_{pH1.0}] - [(A_{520} - A_{700})_{pH4.5}] \quad (\text{Equation 2})$$

The total anthocyanin content (TA)(mg/L) was calculated using equation 3:

$$TA = \frac{A \times W \times DF \times 1000}{\epsilon \times L} \quad (\text{Equation 3})$$

Where ϵ is the cyanindin-3-glucoside molar absorption coefficient (26,900), L is the cell path length (1 cm), W is the molecular weight of cyanindin-3-glucoside (449.2 Da), DF is the dilution factor. Data were expressed as mg of cyanindin-3-glucoside equivalents (CGE) per 100 g of dry matter (dm).

2.4.4 Vitamin C (VIT C)

The extraction of vitamin C (VIT C) was based on the procedure proposed by Odriozola-Serrano, Hernández-Jover and Martín-Belloso (2007). A portion of 2.5 mL of extract was added to 2.5 mL of 45 g/L metaphosphoric solution containing 1,4-Dithiothreitol (7.2 g/L). The mixture was homogenized, passed through a Millipore 0.45 μ m membrane and injected in the HPLC system. The HPLC system was equipped with a 600 Controller and a 486 Absorbance Detector (Waters, Milford, MA) working at 245 nm. Samples were introduced onto the column through a manual injector equipped with a sample loop (20 μ l). The flow rate was fixed at 1.0 mL/min at room temperature. A reverse-phase C18 Spherisorb® ODS2 (5 μ m) stainless steel column (4.6 mm 250 mm) was used

144 as stationary phase. The mobile phase was a 0.1 g/L solution of sulphuric acid adjusted to pH 2.6 (Sanchez-Mata
145 et al., 2000). Calibration curve was built with L-ascorbic acid (0-50 mg/L). Results were expressed as mg of VIT
146 C per 100 g of dry matter (dm).

147 **2.5 Determination of antioxidant activity (AA)**

148 DPPH assay was used to assess the free radical scavenging activity. The assay was performed according to
149 Redondo et al. (2018) adapted to a microplate reader. The reaction was initiated by addition of 280 µL/well
150 DPPH solution in ethanol (25 µg/mL) to 20 µL/well extracts, properly diluted. The reaction mixture was kept in
151 the dark for 10 min and its absorbance was then measured at 517 nm using a UV/VIS Thermo Multiskan
152 Spectrum spectrophotometer (Thermo Scientific, Waltham, USA). Ethanol blanks (70 g/100 g) were run in each
153 assay. The antioxidant activity (AA) was evaluated by measuring the variation in absorbance at 515 nm after 15
154 min of reaction. Calibration curve was built with trolox (0.005–0.250 mg/L). Results were expressed as mmol of
155 trolox equivalents (TE) per 100 g of dry matter (dm).

156 **2.6 Extraction efficacy**

157 The extraction efficacy was calculated according to equation 4:

$$158 \text{ Efficacy (\%)} = \frac{C_{max} - C_{control}}{C_{control}} \times 100 \quad (\text{Equation 4})$$

159 where C_{max} represents the maximal concentration or maximal antioxidant activity reached by PEF or CTT
160 assisted extractions for PP extracts, and $C_{control}$ is the extract control concentration or antioxidant activity
161 obtained from untreated PP extracts. ANOVA test (section 2.8) was used to identify the maximum concentration
162 or antioxidant activity.

163 **2.7 Kinetic models**

164 **2.7.1 Extraction kinetic considerations**

165 The content variation of the different biocompounds extracted by applying CTT processes was evaluated through
166 a kinetic mechanism consisting of two consecutive and simultaneous stages. The proposed mechanism considers
167 a first step in which the bioactive compounds (B) are released from the substrate (S) and pass from the food
168 matrix to the solution according to a zero kinetic order, and a second step, in which the bioactive compounds

may disappear from the solution, leading to degraded derivatives of bioactive compounds (B_D), following a first kinetic order (eq. 5):



For CTT, the first and second stage of the extraction mechanism have been reported to have a kinetic constant k_0 and an order $n = 0$ and a kinetic constant k_1 and an order $n = 1$, respectively (Ibarz, Pagán, & Garza, 1999). Thus, the variation of the concentration of each bioactive or the extract antioxidant activity (C) as a function of extraction time (t) may be derived from equation 6:

$$\frac{d C_B}{d t} = k_0 - k_1 C_B \quad (\text{Equation 6})$$

This differential equation can be integrated with the initial condition that, for $t = 0$, the concentration of the bioactive compound is C_{B0} . This integration allows obtaining equation 7:

$$C_B = K - (K - C_{B0}) \cdot e^{-k_1 t} \quad (\text{Equation 7})$$

where C_B is the concentration of bioactive compounds or the antioxidant activity of the extract at time t during thermal extraction, C_{B0} is the initial concentration ($t = 0$) and K is a constant relation between k_0 and k_1 ($K = \frac{k_0}{k_1}$).

2.7.2 Influence of applied energy density

When food matrices are treated for extraction purposes by assisted technologies, commonly, some of the extractable biocompounds are degraded depending on the effect of the treatment variable (time, temperature, energy density, etc.). This treatment variable is the one that during the process exerts the role of independent variable, while the concentration of the component that undergoes degradation is the dependent variable. In many processes, the dependent variable (y) varies decreasing according to a degradation function starting from the initial value of the dependent variable (y_0), until reaching an equilibrium value (y_{eq}).

In order to obtain a model for those processes, we consider an exponential decrease variation, according to equation 8:

$$y = y_{eq} + (y_0 - y_{eq}) \cdot e^{-k'_i x} \quad (\text{Equation 8})$$

In the case of PP extracts obtained by PEF the dependent variable C_B represents the concentration of different biocompounds, C_{eq} is the equilibrium value, C_{B0} is the initial value, k'_i is the kinetic constant or constants of the

194 degradation process and the energy density (E_v) is the independent variable, defined as reported in eq. 1. In the
195 PEF extraction processes, an overshoot was observed at low E_v values, allowing biocompound release into the
196 extraction media. By contrast, with the increase of E_v , a progressive decrease of biocompound concentration was
197 observed. It is assumed that the biocompounds extracted from PP can be divided in at least two categories,
198 showing different sensitivity to the PEF treatment conditions, so that a two-term exponential decay model was
199 proposed, which explains the biocompound degradation in our study (equation 9):

$$200 \quad C_B = C_{eq} + (C_{B0} - C_{eq}) \cdot (e^{-k'_1 E_v} + e^{-k'_2 E_v}) \quad (\text{Equation 9})$$

201 where k'_1 and k'_2 are the degradation kinetic constants of the biocompounds with different sensitivities to the
202 applied E_v .

203 **2.8 Statistical analysis**

204 All determinations were expressed as the mean \pm standard error of at least three repeated measurements from
205 two experiment replicates. Statistical analysis was performed by using R v. 3.0.2 (The R Foundation for
206 Statistical Computing). Bartlett's test was used to check the homogeneity of variance, one-way ANOVA was
207 carried out and the Tukey test was used to determine statistically significant differences among means ($p < 0.05$).
208 Experimental data were fitted to the kinetic expressions by non-linear regression procedures using
209 TableCurve2D software (Jandel Scientific, ver. 5.01). The fittings were calculated at a 95% significance level
210 and the goodness of fit was evaluated based on statistical parameters of fitting (R^2).

211 **3. Results and Discussion**

212 **3.1 Characterization of frozen and dried PP**

213 In this study, extracts rich in antioxidant biocompounds were obtained from frozen and dried PP. Freezing or
214 drying would be required in a realistic PP valorisation scenario to stabilize fresh PP and allow its further
215 processing.

216 Control extracts were obtained from frozen and dried PP and their biocompound composition and antioxidant
217 activity is reported in Table 1. Interestingly, the total phenolic content (TPC) of the extracts from dried PP (416
218 ± 7 mg GAE/100 g dm) resulted significantly higher ($p < 0.05$) than that of the frozen one (204 ± 4 mg GAE/100

g dm) (Table 1). These results are most likely attributable to the matrix drying treatment. The latter, in fact, not only increases the porosity, and thus the extractive surface, of the vegetable matrix (Londoño-Londoño et al., 2010), but is also responsible for the formation of thermal-induced novel compounds. In particular, dried PP extracts may include Maillard reaction derivatives, able to react with the Folin reagent used for TPC determination (Echavarria, Pagán, & Ibarz, 2013; Mrkic, Cocci, Dalla Rosa, & Sacchetti, 2006). By contrast, total flavonoids (TF) resulted higher ($p<0.05$) in the frozen PP extract (32 ± 3 mg QE/100 g dm) than in the dried PP (12.1 ± 0.8 mg QE/100 g dm) (Table 1). This can be due to flavonoid degradation during peach pomace air-drying, which has been observed in different vegetables (Sharma et al., 2015; Zainol, Abdul-Hamid, Bakar, & Dek, 2009). Moreover, anthocyanins (TA), and vitamin C (VIT C) content of the frozen PP extract were 0.30 ± 0.04 mg CGE/100 g dm and 61 ± 5 mg VIT C/100 g dm, respectively, while they were not detectable in the dried PP extracts. This is surely attributable to the fact that the high temperature applied (140°C) to produce PP flour degraded these compounds. In this regard, Kara and Ercçelebi (2013) found a 90% anthocyanin reduction in mulberry juice upon thermal treatment at 80°C . Similarly, Vikram, Ramesh, and Prapulla (2005) reported a 50% VIT C degradation in orange juice upon only 3 min heating at 90°C . These compounds are known to exert a prominent antioxidant activity (AA) and their almost complete absence in the dried PP extract strongly affected its AA (97 ± 9 mg TE/100 g dm), which resulted significantly lower ($p<0.05$) than that of the frozen PP extract (131.0 ± 0.3 mg TE/100 g dm, Table 1).

3.2 Extraction assisted by conventional thermal treatment (CTT)

The treatment temperature for CTT assisted extraction was set at 50°C , which is commonly indicated as the minimum temperature for thermal processes (Patras, Brunton, O'Donnell, & Tiwari, 2010), in order to preserve as much as possible bioactive compounds from thermal damage. The maximum biocompound concentration and antioxidant activity (C_{max}) obtained upon the CTT extraction procedure was identified based on ANOVA. According this analysis, the extract from frozen PP presented C_{max} values for TPC, TF, TA and AA of 400 ± 21 mg GAE/100 g dm, 147 ± 3 mg QE/100 g dm, 2.74 ± 0.09 mg CGE/100 g dm and 185 ± 2 mg TE/100 g dm, respectively, which resulted about 2.0, 4.7, 9.1 and 1.4 times higher than those of the corresponding control extract (Table 1). By contrast, the C_{max} value relevant to VIT C (61 ± 5 mg/100 g dm) resulted comparable to

245 that of the control extract ($p \geq 0.05$, Table 1). In the case of CTT of dried PP extracts, the C_{max} values for TPC
 246 (524 ± 27 mg GAE/100 g dm), TF (108 ± 1 mg QE/100 g dm) and AA (143 ± 7 mg TE/100 g dm) resulted 1.2,
 247 8.9 and 1.5 times higher than those of control extracts (Table 1), respectively, while TA and VIT C were always
 248 not detectable.

249 Figure 1 reports the evolution of biocompound concentration and antioxidant activity during CTT. For both
 250 frozen and dried PP, the biocompound concentration and the AA of the extracts increased with the extraction
 251 time up to a certain time, after which, a subsequent decrease in the extraction rate, until reaching a plateau value,
 252 was observed. As already anticipated, the only exception was represented by VIT C, whose extraction was not
 253 promoted by CTT extraction, probably due to the thermal sensitivity of this biocompound (Rawson et al., 2011).
 254 This extraction pattern largely agrees with literature studies relevant to the extraction in hydroalcoholic solutions
 255 (50-80% ethanol) of bioactive compounds from vegetable by-products including grape seeds and soybeans
 256 (Bucić-Kojić, Planinić, Tomas, Bilić, & Velić, 2007; Jokic et al., 2010). Similar results were observed by El
 257 Darra et al. (2018) in PP (pressed skins and pulp residues obtained by peach processing into jams and purees)
 258 subjected to ethanolic solid-liquid extraction at 50 °C.

259 The two-stage mechanism proposed in equation 5 fit well the obtained data in the CTT assisted extraction of
 260 biocompounds and their antioxidant activity, as it is shown in Figure 1. In the first extraction stage, the solvent
 261 diffuses inside the cellular structure and biocompounds are extracted from the matrix, increasing their
 262 concentration in the extraction solvent; in the second one, an almost stabilization of the extraction yield is
 263 reached, which means that biocompound disappearance from the extract occurs concomitantly to extraction,
 264 possibly due to biocompound thermal degradation (Ibarz et al., 1999).

265 CTT extraction data were modelled using the kinetic model presented in eq. 7, which well-fitted experimental
 266 data, with a R_{adj}^2 higher than 0.90 (Table 2). The estimated parameters showed a value of K always higher than 1,
 267 indicating a predominance of extraction step (associated to the kinetic constant k_0) over thermal degradation (k_I).
 268 The latter seemed to occur similarly for all the biocompounds, as indicated by comparable k_I values. By contrast,
 269 differences in extraction rates (k_0) were observed. In fact, in the case of frozen PP, TPC and TF showed k_0 (16
 270 and 6 c.u./min) and consequently K values (507 ± 22 and 174 ± 9 c.u.) two order of magnitude higher than those

of TA ($k_0 = 0.084$ c.u./min; $K = 3.6 \pm 0.5$ c.u.) (Table 2), suggesting that TA were extracted according to a slower kinetics. Although the similar kinetic values observed in frozen and dried PP for both TPC and TF, the k_0 and k_I of AA resulted two-folds higher in the case of frozen PP ($k_0 = 10$ c.u./min; $k_I = 0.054 \pm 0.012 \text{ min}^{-1}$), indicating that both stages occurred more rapidly. This possibly suggests that the biocompounds extracted from frozen PP exerted a higher antioxidant activity as compared to those extracted from dried PP but were also more prone to degradation.

3.3 Extraction assisted by pulsed electric fields (PEF)

Frozen and dried PP extracts were obtained applying PEF at field strengths from 0.8 up to 10 kV/cm and for increasing pulse numbers up to 30, leading to energy values up to 20 and 70 kJ/kg, for frozen and dried PP, respectively. As expected, PEF treatments did not induce significant increase in sample temperature, which remained lower than 22 °C. Extraction data showing TPC, TF, TA, VIT C and AA as a function of the applied energy density are reported in Figure 2.

As compared to the control extract (Table 1), the biocompound content and the AA of frozen and dried PP extracts were significantly enhanced ($p < 0.05$) by PEF extraction at the lowest energy densities (E_v) values, i.e. in the range 0.02-0.07 and 0.06-0.26 kJ/kg for, respectively (Figure 2). These E_v values were in fact associated to the maximum concentration of the considered biocompounds and antioxidant activity (C_{max}). These results can be explained based on the capacity of PEF to electroporate the PP vegetable tissue, leading to a faster solubilization of compounds in the extraction solvent (Donsì et al., 2010). By contrast, an increase in PEF E_v beyond these threshold values led to extracts with progressively lower biocompound concentration and AA, until reaching a plateau value (Figure 2). For example, the application of an E_v of 0.02 kJ/kg to the frozen PP resulted in TPC, TF, TA, VIT C and AA values about 1.6, 5.1, 11.8, 1.8 and 1.1 times higher than those of the corresponding control extract (Table 1), while an increase of E_v up to 70 kJ/kg resulted in extraction values comparable or even lower than those of the control extract. The degradation of both anthocyanins and vitamin C has been reported to increase with the increase of PEF treatment intensity in previous studies. Odriozola-Serrano, Soliva-Fortuny, Gimeno-Añó, and Martín-Belloso (2008) noticed a significant decrease in VIT C content of tomato juice with the increase of both PEF treatment time and electric field strength. Similar results

297 were also observed by Zhang et al. (2007) on the degradation of cyanidin-3-glucoside in a model system. By
298 contrast, it must be noted that these results were not expected in the case of other phenolic compounds (TPC and
299 TF), since most of literature studies relevant to PEF extraction of bioactive compounds from waste materials
300 found that PEF extractive efficacy progressively increases with the overall PEF energy, due to the progressive
301 tissue disintegration, (Donsi et al., 2010; Knorr & Angersbach, 1998; Kumari et al., 2018). This difference with
302 the literature suggests that, in the present study, the TPC and TF biocompounds of the PP were more sensitive to
303 PEF degradation. To our knowledge, no data are available on the effect of PEF on an already strongly damaged
304 tissue. In most studies aiming at extracting biocompounds from vegetable discards, the waste material is freshly
305 prepared in laboratory conditions, or freeze-dried, which would guarantee a low cellular damage. By contrast, in
306 the present work, the considered waste material was either frozen or air-dried and ground to flour. It can be
307 inferred that these waste treatments altered the stability of biocompounds by changing their
308 compartmentalization in the cellular tissue. Freezing and drying, in fact, strongly damage cells, favouring the
309 release of intracellular compounds, possibly making them more sensitive to PEF conditions (Karam, Petit,
310 Zimmer, Djantou, & Scher, 2016; Xu, Li, Wang, Yu, & Shao, 2017). This hypothesis is supported by literature
311 studies showing that the increase in PEF-induced bioactive release is commonly associated to a more
312 pronounced degradation of the extracted biocompounds upon further storage (Leong, Burritt, & Oey, 2016).
313 Based on these considerations, the extraction model reported in section 2.7.2 was proposed. According to this
314 mechanism, the degradation of biocompounds upon PEF treatments beyond a threshold E_v value, can be
315 modelled using the two-terms degradation model described by equation 9, which adequately fitted experimental
316 data, as indicated by the high R^2 (Table 3).

317 The proposed degradation model assumes that the PP biocompounds can be classified into two major classes,
318 showing different sensitivity to degradation. In particular, the more labile compounds are identified by the
319 degradation constant k'_1 (ranged from 0.22 to 9.2 kg/kJ), which resulted much higher than that of the second
320 class of biocompounds, which are the more resistant and are identified by the constant k'_2 (ranged from 0.001 to
321 0.012 kg/kJ) (Table 3). It can be noted that the k'_2 values obtained in frozen and dried PP resulted comparable;
322 by contrast, k'_1 values resulted higher for frozen matrix, indicating a more rapid degradation kinetic. During

solid-liquid extraction, three stages take place: (i) solute phase change, during which the biocompounds pass from the solid phase to the liquid, where they are dissolved through the solid-liquid interface; (ii) diffusion of the solute in the solvent contained in the pores of the solid: the solute is transferred from inside the solid particle to its surface, due to the concentration gradient between the solid-liquid interface and the outer surface of the solid, according to Fick law; (iii) transfer of the solute from the surface of the particles to the surface of the solution, driven by a concentration gradient. Differently from dried PP, where it is likely that all the 3 stages took place, the extraction from frozen PP is thought to occur mainly based on the second and third stage, since the matrix was already hydrated, possibly making the first stage more rapid.

3.4 CTT and PEF extraction efficacy

The C_{max} values identified by ANOVA (see section 3.2) were used to calculate the CTT and PEF extraction efficacy according to equation 4 (Table 4). A CTT of at least 40-50 min was needed for reaching the C_{max} in both frozen and dried PP and, beyond this time, no further significant increase was observed. The TF extraction efficacy was 367 ± 11 and 790 ± 12 for frozen and dried PP, respectively, which resulted much higher as compared to the extraction efficacy relevant to TPC (frozen: 96 ± 10 ; dried: 26 ± 7) and AA (frozen: 41.1 ± 1.3 ; dried: 48 ± 6) in both matrices. The extraction efficacy of TA from frozen PP resulted particularly high (809 ± 30) while VIT C was not effectively extracted by CTT, giving an extraction efficacy of 0.25 ± 0.03 .

Regarding PEF extraction efficacy, the minimum E_V was identified as the condition allowing the C_{max} (corresponding to the C_{B0} from Table 3) to be obtained, which were used to estimate the extraction efficacy (Table 4). In the case of dried PP, although PEF treatments resulted in extracts presenting TPC and AA values not significantly different from those of control extract ($p \geq 0.05$), as indicated by the extraction efficacies (-7 ± 5 and -17 ± 8 , respectively), they were quite effective in the extraction of TF (extraction efficacy of 621 ± 51). In the case of frozen PP, PEF resulted in a good extraction efficacy of TPC (57.3 ± 0.4), TF (409 ± 47), VIT C (77 ± 3), AA (14 ± 5), but especially of TA (1080 ± 110).

As compared to CTT extraction efficacy, PEF treatments resulted more efficient ($p < 0.05$) in the extraction of TF, TA and VIT C from frozen PP. In addition, it must be underlined that PEF treatments allowed obtaining C_{max} extraction efficacy higher than those of CTT in a much shorter time. In this sense, the minimum E_V intensity was

delivered by 4-pulse treatments, corresponding to 16 μ s of actual treatment. In this regard, PEF treatments have been largely shown to present a higher efficiency as compared to traditional extraction (Donsì et al., 2010). In this sense, PEF treatments have been successfully applied for the valorisation of vegetable waste streams into extracts presenting a commercial interest, such as pigments, antioxidants, and flavours. For example, PEF treatments at 1-5 kV/cm have been applied to tomato juice waste leading to an extraction efficacy around 45% of β -carotene (Andreou, Dimopoulos, Dermesonlouoglou, & Taoukis, 2020; Pataro, Carullo, & Ferrari, 2019). Similarly, Peiró, Luengo, Segovia, Raso, and Almajano (2019), and Frontuto et al. (2019) found that PEF treatments at field strength lower than 10 kV/cm enhance polyphenol extraction from lemon residues and potato peels by 300% and 10%, respectively.

4. Conclusions

The results obtained in this study allow concluding that the recovery of biocompounds from peach pomace, assisted by conventional thermal treatment (CTT) or pulsed electric fields (PEF) can be adequately explained by the proposed kinetic models, which result to be feasible tools to understand the involved phenomena and predict the assisted extraction results.

Process requirements should be accurately evaluated in order to select the more advantageous extraction procedure. In this regard, although drying would allow reducing waste volumes and avoiding cold-chain storage, freezing better preserves the biocompounds originally present in the peach pomace. Additionally, it must be underlined that PEF treatments would require extraction times in the order of μ s, which is much shorter than the time required for thermal extraction (40 min), reaching similar extraction efficiencies. Thus, in the optic of developing an industrial process for peach waste valorisation, PEF would allow a significant reduction in extraction time. Hence, PEF technology needs E_v between 0.02 and 0.06 kJ/kg to reach maximum biocompound extraction from peach pomace. Nevertheless, the process should be properly optimized in order to avoid a fast degradation of the extracted biocompounds. In particular, it seems that the characteristics of the vegetable matrix before extraction play a key-role in determining PEF extraction efficacy.

373 **5. Acknowledgments**

374 This work has been performed within the project SOE1/P1/E0123 Interreg Sudoe REDVALUE, Technological
375 Alliance to Complete the Forest and Agroindustrial Production Cycle. R. Ibarz thanks the University of Lleida
376 for the postdoctoral contract (UdL-Impuls).

377 **6. References**

- 378 AIJN. (2018). *2018 Liquid fruit market report. Europeann Fruit Juice Association - Market Report 2018*.
- 379 Ajila, C. M., Brar, S. K., Verma, M., & Prasada Rao, U. J. S. (2012). Sustainable solutions for agro processing
380 waste management: an overview. In A. Malik & E. Grohmann (Eds.), *Environmental Protection Strategies*
381 *for Sustainable Development* (pp. 65–109). Dordrecht: Springer Netherlands.
- 382 Andreou, V., Dimopoulos, G., Dermesonlouoglou, E., & Taoukis, P. (2020). Application of pulsed electric fields
383 to improve product yield and waste valorization in industrial tomato processing. *Journal of Food*
384 *Engineering*, 270, 109778.
- 385 AOAC. (1997). *Official methods of analysis. Association of Official Analytical Chemists*. Washington, DC.
- 386 Argun, H., & Dao, S. (2017). Bio-hydrogen production from waste peach pulp by dark fermentation: Effect of
387 inoculum addition. *International Journal of Hydrogen Energy*, 42, 2569–2574.
- 388 Bot, F., Verkerk, R., Mastwijk, H., Anese, M., Fogliano, V., & Capuano, E. (2018). The effect of pulsed electric
389 fields on carotenoids bioaccessibility: The role of tomato matrix. *Food Chemistry*, 240, 415–421.
- 390 Bucić-Kojić, A., Planinić, M., Tomas, S., Bilić, M., & Velić, D. (2007). Study of solid-liquid extraction kinetics
391 of total polyphenols from grape seeds. *Journal of Food Engineering*, 81, 236–242.
- 392 Cacace, J. E., & Mazza, G. (2003). Mass transfer process during extraction of phenolic compounds from milled
393 berries. *Journal of Food Engineering*, 59, 379–389.
- 394 Chaovanalikit, A., & Wrolstad, R. E. (2004). Total anthocyanins and total phenolics of fresh and processed
395 cherries and their antioxidant properties. *Journal of Food Science*, 69, FCT67–FCT72.
- 396 Donsì, F., Ferrari, G., & Pataro, G. (2010). Applications of pulsed electric field treatments for the enhancement
397 of mass transfer from vegetable tissue. *Food Engineering Reviews*, 2, 109–130.

398 Echavarria, A. P., Pagán, J., & Ibarz, A. (2013). Optimization of Maillard reaction products isolated from sugar-
399 amino acid model system and their antioxidant activity. *Afinidad*, 70, 86–92.

400 El Darra, N., Rajha, H. N., Debs, E., Saleh, F., El-Ghazzawi, I., Louka, N., & Maroun, R. G. (2018).
401 Comparative study between ethanolic and β -cyclodextrin assisted extraction of polyphenols from peach
402 pomace. *International Journal of Food Science*, 2018, 1–9.

403 Frontuto, D., Carullo, D., Harrison, S. M., Brunton, N. P., Ferrari, G., Lyng, J. G., & Pataro, G. (2019).
404 Optimization of pulsed electric fields-assisted extraction of polyphenols from potato peels using response
405 surface methodology. *Food and Bioprocess Technology*, 12, 1708–1720.

406 Gil, M. I., Tomás-Barberán, F. A., Hess-Pierce, B., & Kader, A. A. (2002). Antioxidant capacities, phenolic
407 compounds, carotenoids, and vitamin C contents of nectarine, peach, and plum cultivars from California.
408 *Journal of Agricultural and Food Chemistry*, 50, 4976–4982.

409 Humadi, S., & Istudor, V. (2008). Quantitative analysis of bioactive compounds in Hibiscus Sabdariffa L.
410 extracts. Note I-Quantitative analysis of flavonoids. *Farmacia*, IV, 699–708.

411 Ibarz, A., Pagán, J., & Garza, S. (1999). Kinetic models for colour changes in pear puree during heating at
412 relatively high temperatures. *Journal of Food Engineering*, 39, 415–422.

413 Jokic, S., Velic, D., Bilic, M., Ana Bucic-Kojic, Planinic, M., & Tomasa, S. (2010). Modelling of the process of
414 solid-liquid extraction of total polyphenols from soybeans. *Czech Journal of Food Sciences*, 28, 206–212.

415 Kara, Ş., & Erċelebi, E. A. (2013). Thermal degradation kinetics of anthocyanins and visual colour of Urmu
416 mulberry (*Morus nigra* L.). *Journal of Food Engineering*, 116, 541–547.

417 Karam, M. C., Petit, J., Zimmer, D., Djantou, E. B., & Scher, J. (2016). Effects of drying and grinding in
418 production of fruit and vegetable powders: A review. *Journal of Food Engineering*, 188, 32–49.

419 Knorr, D., & Angersbach, A. (1998). Impact of high-intensity electric field pulses on plant membrane
420 permeabilization. *Trends in Food Science and Technology*, 9, 185–191.

421 Kumari, B., Tiwari, B. K., Hossain, M. B., Brunton, N. P., & Rai, D. K. (2018). Recent advances on application
422 of ultrasound and pulsed electric field technologies in the extraction of bioactives from agro-industrial by-
423 products. *Food and Bioprocess Technology*, 11, 223–241.

424 Leong, S. Y., Burritt, D. J., & Oey, I. (2016). Evaluation of the anthocyanin release and health-promoting
 425 properties of Pinot Noir grape juices after pulsed electric fields. *Food Chemistry*, 196, 833–841.

426 Li, B. B., Smith, B., & Hossain, M. M. (2006). Extraction of phenolics from citrus peels: I. Solvent extraction
 427 method. *Separation and Purification Technology*, 48, 182–188.

428 Londoño-Londoño, J., Lima, V. R., de Lara, O., Gil, A., Pasa, T. B. C., Arango, G. J., & Pineda, J. R. R. (2010).
 429 Clean recovery of antioxidant flavonoids from citrus peel: Optimizing an aqueous ultrasound-assisted
 430 extraction method. *Food Chemistry*, 119, 81–87.

431 Medina, M. B. (2011). Simple and rapid method for the analysis of phenolic compounds in beverages and grains.
 432 *Journal of Agricultural and Food Chemistry*, 59, 1565–1571.

433 Mrkic, V., Cocci, E., Dalla Rosa, M., & Sacchetti, G. (2006). Effect of drying conditions on bioactive
 434 compounds and antioxidant activity of broccoli (*Brassica oleracea* L.). *Journal of the Science of Food and*
 435 *Agriculture*, 86, 1559–1566.

436 Odriozola-Serrano, I., Hernández-Jover, T., & Martín-Belloso, O. (2007). Comparative evaluation of UV-HPLC
 437 methods and reducing agents to determine vitamin C in fruits. *Food Chemistry*, 105, 1151–1158.

438 Odriozola-Serrano, I., Soliva-Fortuny, R., Gimeno-Añó, V., & Martín-Belloso, O. (2008). Modeling changes in
 439 health-related compounds of tomato juice treated by high-intensity pulsed electric fields. *Journal of Food*
 440 *Engineering*, 89, 210–216.

441 Pataro, G., Carullo, D., & Ferrari, G. (2019). Effect of PEF pre-treatment and extraction temperature on the
 442 recovery of carotenoids from tomato wastes. *Chemical Engineering Transactions*, 75, 139–144.

443 Patras, A., Brunton, N. P., O'Donnell, C., & Tiwari, B. K. (2010). Effect of thermal processing on anthocyanin
 444 stability in foods; mechanisms and kinetics of degradation. *Trends in Food Science and Technology*, 21, 3–
 445 11.

446 Peiró, S., Luengo, E., Segovia, F., Raso, J., & Almajano, M. P. (2019). Improving polyphenol extraction from
 447 lemon residues by pulsed electric fields. *Waste and Biomass Valorization*, 10, 889–897.

448 Rawson, A., Patras, A., Tiwari, B. K., Noci, F., Koutchma, T., & Brunton, N. (2011). Effect of thermal and non
 449 thermal processing technologies on the bioactive content of exotic fruits and their products: Review of

450 recent advances. *Food Research International*, 44, 1875–1887.

451 Redondo, D., Arias, E., Oria, R., & Venturini, M. E. (2017). Thinned stone fruits are a source of polyphenols and
452 antioxidant compounds. *Journal of the Science of Food and Agriculture*, 97, 902–910.

453 Redondo, D., Venturini, M. E., Luengo, E., Raso, J., & Arias, E. (2018). Pulsed electric fields as a green
454 technology for the extraction of bioactive compounds from thinned peach by-products. *Innovative Food
455 Science and Emerging Technologies*, 45, 335–343.

456 Rombaut, N., Tixier, A.-S., Bily, A., & Chemat, F. (2014). Green extraction processes of natural products as
457 tools for biorefinery. *Biofuels, Bioproducts and Biorefining*, 8, 530–544.

458 Sharma, K., Ko, E. Y., Assefa, A. D., Ha, S., Nile, S. H., Lee, E. T., & Park, S. W. (2015). Temperature-
459 dependent studies on the total phenolics, flavonoids, antioxidant activities, and sugar content in six onion
460 varieties. *Journal of Food and Drug Analysis*, 23, 243–252.

461 Vikram, V. B., Ramesh, M. N., & Prapulla, S. G. (2005). Thermal degradation kinetics of nutrients in orange
462 juice heated by electromagnetic and conventional methods. *Journal of Food Engineering*, 69, 31–40.

463 Xu, C., Li, Y., Wang, L., Yu, C., & Shao, L. (2017). Evaluating and correlating the mechanical, nutritional, and
464 structural properties of carrots after multiple freezing/thawing processing. *Journal of Food Science and
465 Technology*, 54, 2251–2259.


466 Zainol, M. K. M., Abdul-Hamid, A., Bakar, F. A., & Dek, S. P. (2009). Effect of different drying methods on the
467 degradation of selected flavonoids in *Centella asiatica*. *International Food Research Journal*, 16, 531–537.

468 Zhang, Y., Liao, X., Ni, Y., Wu, J., Hu, X., Wang, Z., & Chen, F. (2007). Kinetic analysis of the degradation and
469 its color change of cyanidin-3-glucoside exposed to pulsed electric field. *European Food Research and
470 Technology*, 224, 597–603.

Highlights

- PEF treatment resulted more efficient in the assisted extraction of TF, TA and VIT C
- Proposed kinetic models were proved to explain the thermal and PEF assisted extraction
- Extraction was predominant over degradation steps in the CTT assisted extraction
- A significant relationship was found between PEF E_v and biocompound degradation


Figure 1

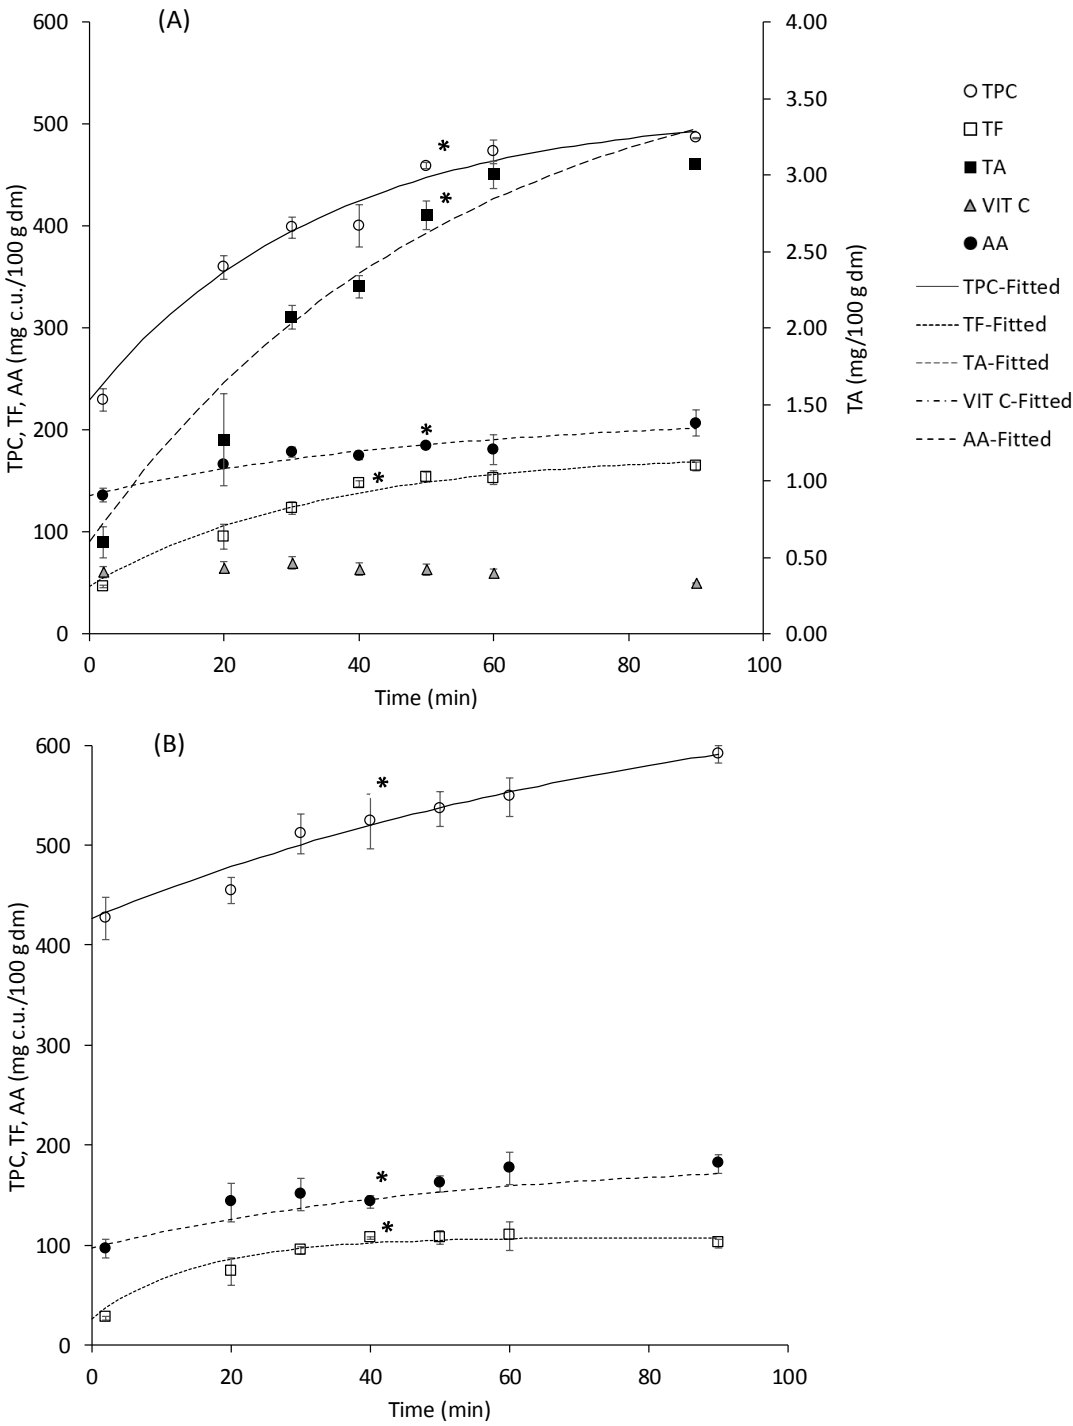

1

2 Figure 1. Evolution of antioxidant biocompounds concentration assisted by CTT extraction process for frozen
3 (A) and dried (B) peach waste. Data shown are a mean \pm standard deviation. TPC: Total phenolic content (mg
4 GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100
5 g dm); AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by DPPH assay; c.u.: concentration
6 units; * maximal concnetration (C_{max}) identified by ANOVA.

Figure 2

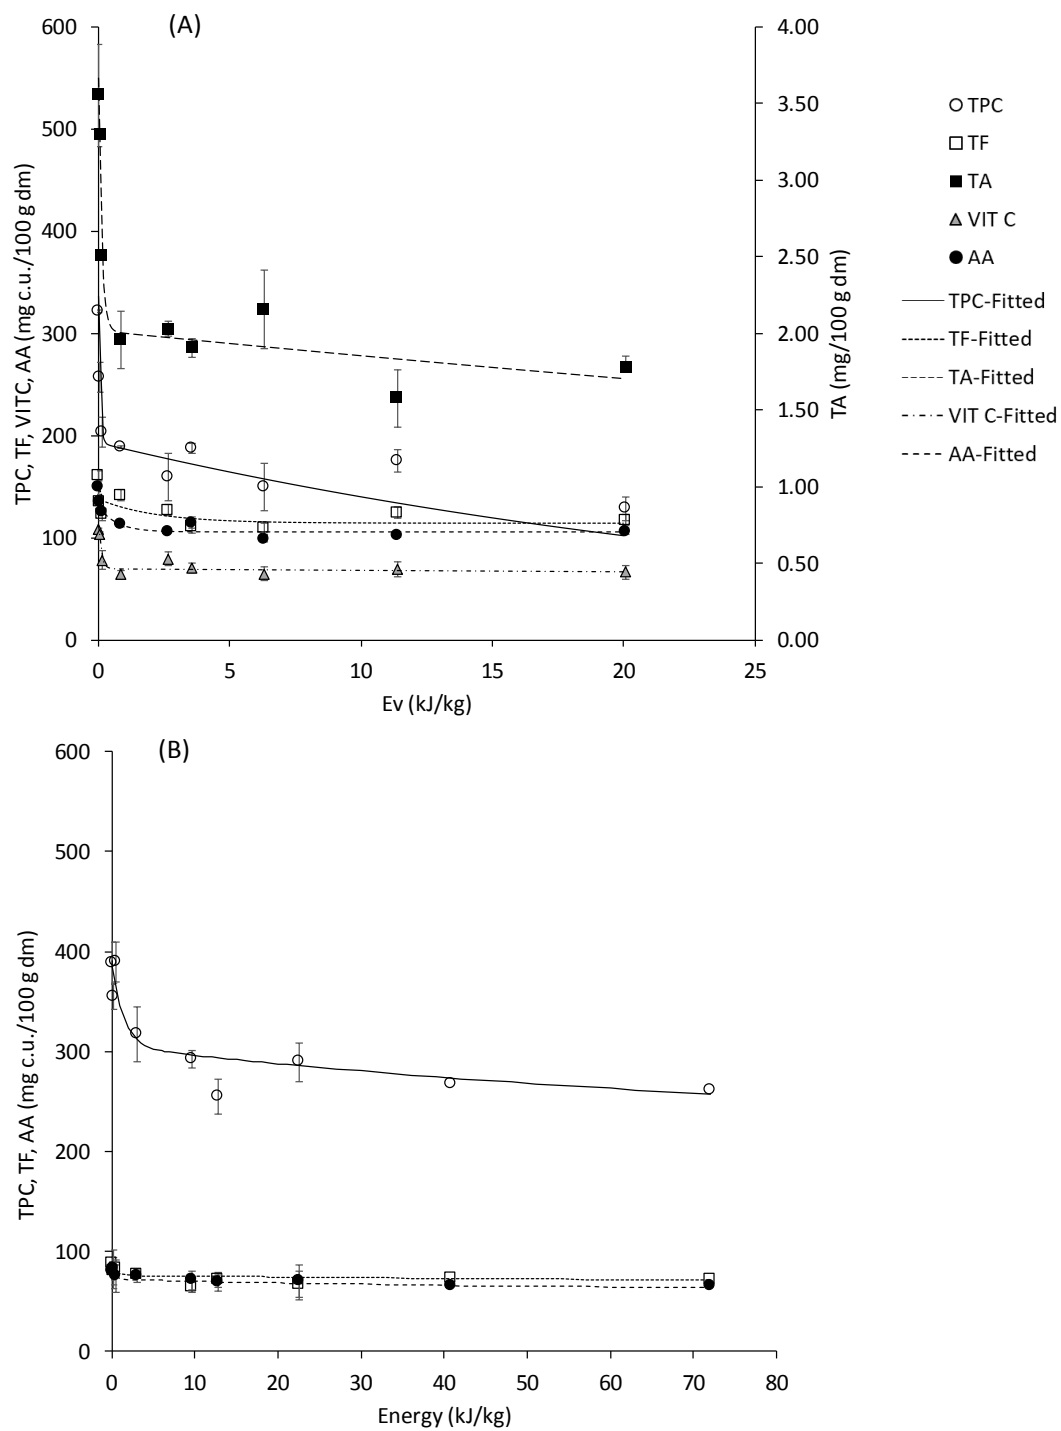

1
2 Figure 2. Evolution of antioxidant biocompounds concentration assisted by PEF extraction process for frozen
3 (A) and dried (B) peach pomace. Data shown are a mean \pm standard deviation. TPC: Total phenolic content (mg
4 GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100
5 g dm); Vit C: Total vitamin C content; AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by
6 DPPH assay; c.u.: concentration units.

Table 1. Biocompound concentration and antioxidant activity of control extracts obtained from untreated frozen and dried peach pomace. Data shown are a mean ± standard deviation. TPC: Total phenolic content (mg GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100 g dm); VIT C: Vitamin C (mg VIT C/100 g dm); AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by DPPH assay; ND: not detectable.

<i>Peach pomace</i>	<i>TPC</i>	<i>TF</i>	<i>TA</i>	<i>VIT C</i>	<i>AA</i>
Frozen	204 ± 4	32 ± 3	0.30 ± 0.04	61 ± 5	131.0 ± 0.3
Dried	416 ± 7	12.1 ± 0.8	ND	ND	97 ± 9

Table 2. Estimated kinetic parameters of CTT (equation 7) to describe the assisted extraction process for frozen and dried peach pomace. Data shown are a mean ± standard error. TPC: Total phenolic content (mg GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100 g dm); AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by DPPH assay; c.u.: concentration units.

CTT model: $C_B = K - (K - C_{B0}) \cdot e^{-k_1 t}$

<i>Peach pomace</i>	<i>Biocompound/ Antioxidant activity</i>	$C_{B0} (c.u.)$	$K (c.u.)$	$k_1 (min^{-1})$	$k_0 (c.u./min)^*$	R^2
Frozen	TPC	212 ± 18	507 ± 22	0.032 ± 0.007	16	0.9797
	TF	35 ± 8	174 ± 9	0.034 ± 0.007	6.0	0.981
	TA	0.35 ± 0.24	3.6 ± 0.5	0.023 ± 0.008	0.084	0.9631
	AA	130 ± 5	186 ± 3	0.054 ± 0.012	10.0	0.9692
Dried	TPC	411 ± 17	574 ± 28	0.027 ± 0.011	15	0.9360
	TF	15 ± 8	110 ± 5	0.059 ± 0.014	6.5	0.9695
	AA	94 ± 10	189 ± 17	0.027 ± 0.012	5.2	0.9290

* calculated as $K \times k_1$

Table 3. Estimated kinetic parameters of PEF (equation 9) to describe the assisted extraction process for frozen and dried peach pomace. Data shown are a mean \pm standard error. TPC: Total phenolic content (mg GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100 g dm); VIT C: Vitamin C (mg/100 g dm); AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by DPPH assay; c.u.: concentration units.

$$\text{PEF model: } C_B = C_{eq} + (C_{B0} - C_{eq}) \cdot (e^{-k'_1 E_V} + e^{-k'_2 E_V})$$

<i>Peach waste</i>	<i>Biocompound/ Antioxidant activity</i>	$C_{B0} (c.u.)$	$C_{eq} (c.u.)$	$k'_1 (kg/kJ)$	$k'_2 (kg/kJ)$	R^2
Frozen	TPC	371 \pm 32	182 \pm 10	15 \pm 4	0.012 \pm 0.006	0.9516
	TF	176 \pm 17	117 \pm 6	17 \pm 9	0.0010 \pm 0.0095	0.8603
	TA	3.9 \pm 0.3	2.01 \pm 0.13	8.2 \pm 3.0	0.008 \pm 0.007	0.9422
	VIT C	119 \pm 11	70 \pm 5	9.2 \pm 4.5	0.003 \pm 0.009	0.8788
	AA	156 \pm 8	109 \pm 3	8.5 \pm 3.4	0.007 \pm 0.008	0.9300
Dried	TPC	386 \pm 13	278 \pm 18	0.31 \pm 0.19	0.002 \pm 0.004	0.9221
	TF	86 \pm 3	68 \pm 5	0.31 \pm 0.29	0.0010 \pm 0.0061	0.7616
	AA	80 \pm 2	70 \pm 3	0.22 \pm 0.19	0.008 \pm 0.008	0.9156

Table 4. Extraction efficacy of the conventional thermal treatment (CTT) and pulsed electric fields (PEF) assisted extraction process for frozen and dried peach pomace. Data shown are a mean \pm standard error. TPC: Total phenolic content (mg GAE/100 g dm); TF: Total flavonoid content (mg QE/100 g dm); TA: Total anthocyanin content (mg CGE/100 g dm); VIT C: Vitamin C (mg/100 g dm); AA: Antioxidant scavenging activity (mg TE/100 g dm) measured by DPPH assay.

<i>Peach pomace</i>	<i>Biocompound/ Antioxidant activity</i>	<i>Extraction efficacy (%)</i>	
		<i>CTT</i>	<i>PEF</i>
Frozen	TPC	96 \pm 10	57.3 \pm 0.4
	TF	367 \pm 11	409 \pm 47
	TA	809 \pm 30	1080 \pm 110
	VIT C	0.25 \pm 0.03	77 \pm 3
	AA	41.1 \pm 1.3	14 \pm 5
Dried	TPC	26 \pm 7	-7 \pm 5
	TF	790 \pm 12	621 \pm 51
	AA	48 \pm 6	-17 \pm 8

Declaration of interests

☒ The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

☐ The authors declare the following financial interests/personal relationships which may be considered as potential competing interests:

--